

LUDWIG


CONTROL PLUGS FOR SECONDARY CIRCUIT

MATERIALS

THE INSULATION HOUSING IS MADE FROM INJECTION MOULDED WITH 30% GLASS FILLED POLYESTER RESIN. SELF EXTINGUISHING TYPE.

CONDUCTING CONTACT

THE CONDUCTING CONTACT IS MADE FROM PRESS-FORMED ELECTROLYTIC GRADE COPPER WITH SILVER PLATED.

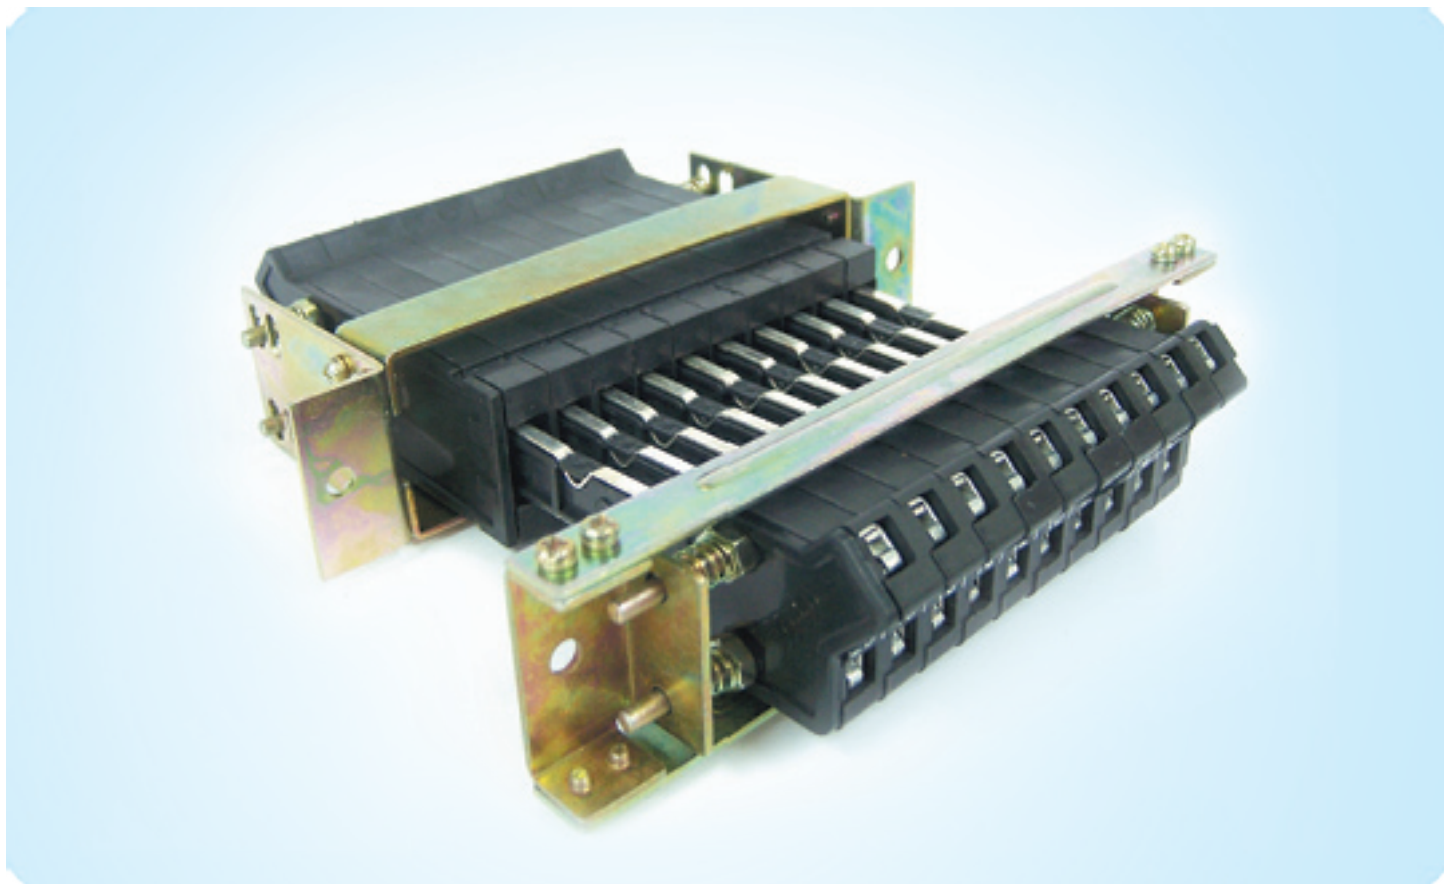

TECHNICAL DATA

APPLICABLE STANDARD :	IEC 60439-1 BS EN 60 439-1 AS 3439.1
APPLICATION :	20 POLES
MODEL :	LW-20P-10A
CONTACTS PER POLES	1
RATED OPERATIONAL VOLTAGE	UP TO 690VAC
RATED INSULATION VOLTAGE	1000VAC
RATED CURRENT	10A
FREQUENCY	40-60HZ
PERMISSABLE AMBIENT TEMPERATURE	-10 TO + 70° C